

FOR FURTHER TRAN *HA 214*




Report 2240

QUANTITATIVE DETERMINATION OF MONOETHANOLAMINE  
AND GLYCOL ETHERS IN CARBON-REMOVING COMPOUNDS

by  
Troy R. Nichols

April 1978

Approved for public release; distribution unlimited.

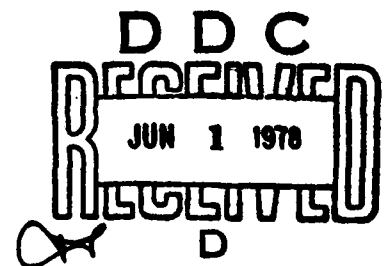

U.S. ARMY MOBILITY EQUIPMENT  
RESEARCH AND DEVELOPMENT COMMAND  
FORT BELVOIR, VIRGINIA

AD A 054563

DDC FILE COPY



**Destroy this report when it is no longer needed.  
Do not return it to the originator.**

**The citation in this report of trade names of commercially  
available products does not constitute official endorsement  
or approval of the use of such products.**

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

(14) MERALCOM-2240

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER 2240	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
6. TITLE (and Subtitle) QUANTITATIVE DETERMINATION OF MONO-ETHANOLAMINE AND GLYCOL ETHERS IN CARBON-REMOVING COMPOUNDS.		9. TYPE OF REPORT & PERIOD COVERED Interim <del>rept.</del> rept.
10. AUTHOR Troy R/Nichols		8. CONTRACT OR GRANT NUMBER(s) (12) 13p
9. PERFORMING ORGANIZATION NAME AND ADDRESS Material Technology Laboratory U.S. Army Mobility Equipment Research and Development Command; Fort Belvoir, Virginia 22060		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS (16) 1L1621/5AH84
11. CONTROLLING OFFICE NAME AND ADDRESS Material Technology Laboratory, DRDME-V; U.S. Army Mobility Equipment Research and Development Command; Fort Belvoir, Virginia 22060		12. REPORT DATE (11) Apr 78
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		13. NUMBER OF PAGES
		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		16a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)  Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Monoethanolamine Glycol ethers Carbon removers Federal Specification P-C-111D GLC Analysis		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The continuing investigation to develop analytical methods for control of Federal and Military Specification products has resulted in a single method for the determination of monoethanolamine and the glycol ethers in Federal Specification P-C-111D, Carbon-Removing Compound.		

403 160

H

## PREFACE

Authority for the work covered by this report is contained in Project 1L162105AH84.

The period covered is 1977.

The investigation was performed by T. Nichols and reviewed by M. Adams under the supervision of E. J. York, Chief, Material Technology Laboratory, MERADCOM, Fort Belvoir, Virginia.

ADCS-104 for	
RTIC	RTIC Section <input checked="" type="checkbox"/>
DDC	DDC Section <input type="checkbox"/>
WAD/AD/AD/AD	<input type="checkbox"/>
AD/AD/AD/AD	
ST.	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	AD/AD. and/or SPECIAL
A	

## CONTENTS

Section	Title	Page
	PREFACE	iii
	ILLUSTRATIONS	v
	TABLES	v
	METRIC CONVERSION FACTORS	vi
I	INTRODUCTION	
	1. Subject	1
	2. Background	1
II	DETAILS OF TEST	
	3. Instrumental Analysis	2
	4. Calculations	2
	5. Preparation of Sample	3
	6. Results	3
III	CONCLUSION	
	7. Conclusion	6

## ILLUSTRATIONS

Figure	Title	Page
1	Chromatogram of a Carbon-Removing Compound Formulated to Meet All of the Requirements of P-C-111D.	4
2	Chromatogram of Commercial Carbon-Removing Compound.	5

## TABLES

Table	Title	Page
1	Composition Requirements for Federal Specification P-C-111D Carbon-Removing Compound	1
2	Comparison Formula for P-C-111D Carbon-Removing Compound	2
3	Analysis of Carbon-Removing Compound with Known Concentrations	6
4	Analytical Results Compared to Claimed Composition of a Commercial Sample of Carbon-Removing Compound	6

# **METRIC CONVERSION FACTORS** Approximate Conversions to Metric Measures

Symbol	When You Know	Multiply by	To Find	Symbol
--------	---------------	-------------	---------	--------

## **LENGTH**

in	inches	2.5	centimeters	cm
ft	feet	30	centimeters	cm
yd	yards	0.9	meters	m
mi	miles	1.6	kilometers	km

## **AREA**

in <sup>2</sup>	square inches	6.5	square centimeters	cm <sup>2</sup>
ft <sup>2</sup>	square feet	0.09	square meters	m <sup>2</sup>
yd <sup>2</sup>	square yards	0.8	square meters	m <sup>2</sup>
mi <sup>2</sup>	square miles	2.6	square kilometers	km <sup>2</sup>
	acres	0.4	hectares	ha

## **MASS (weight)**

oz	ounces	28	grams	g
lb	pounds	0.45	kilograms	kg
	short tons (2000 lb)	0.9	metric tons	t


## **VOLUME**


tsp	teaspoons	5	milliliters	ml
Tbsp	tablespoons	15	milliliters	ml
fl oz	fluid ounces	30	milliliters	ml
c	cups	0.24	liters	L
pt	pints	0.47	liters	L
qt	quarts	0.96	liters	L
gal	gallons	3.8	liters	L
ft <sup>3</sup>	cubic feet	0.03	cubic meters	m <sup>3</sup>
yd <sup>3</sup>	cubic yards	0.76	cubic meters	m <sup>3</sup>

## **TEMPERATURE (exact)**

°F	Fahrenheit temperature	5/9 (after subtracting 32)	Celsius temperature	°C
----	---------------------------	----------------------------------	------------------------	----

\* 1 in = 2.54 cm (exactly).





### Approximate Conversions from Metric Measures

Symbol	When You Know	Multiply by	To Find	Symbol
--------	---------------	-------------	---------	--------

#### LENGTH

mm	millimeters	0.04	inches	in
cm	centimeters	0.4	inches	in
m	meters	3.3	feet	ft
m	meters	1.1	yards	yd
km	kilometers	0.6	miles	mi

#### AREA

cm <sup>2</sup>	square centimeters	0.16	square inches	in <sup>2</sup>
m <sup>2</sup>	square meters	1.2	square yards	yd <sup>2</sup>
km <sup>2</sup>	square kilometers	0.4	square miles	mi <sup>2</sup>
ha	hectares (10 000 m <sup>2</sup> )	2.6	acres	

#### MASS (weight)


g	grams	0.035	ounces	oz
kg	kilograms	2.2	pounds	lb
t	metric tons (1000 kg)	1.1	short tons	

#### VOLUME

ml	milliliters	0.03	fluid ounces	fl oz
L	liters	2.1	pints	pt
L	liters	1.06	quarts	qt
L	liters	0.26	gallons	gal
m <sup>3</sup>	cubic meters	36	cubic feet	ft <sup>3</sup>
m <sup>3</sup>	cubic meters	1.3	cubic yards	yd <sup>3</sup>

#### TEMPERATURE (exact)

°C	Celsius temperature	9/5 (then add 32)	Fahrenheit temperature	°F
----	---------------------	-------------------	------------------------	----

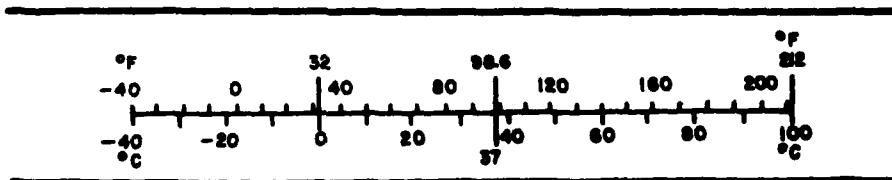



# QUANTITATIVE DETERMINATION OF MONOETHANOLAMINE AND GLYCOL ETHERS IN CARBON-REMOVING COMPOUND

## I. INTRODUCTION

1. **Subject.** The object of this investigation was to develop an improved method for the determination of monoethanolamine in carbon-removing compounds.

2. **Background.** Carbon removers and other types of metal conditioners frequently incorporate glycol ethers and ethanolamines in their formulations. These materials have proved effective in performance and satisfactory in cost. The formulated products are generally procured by the Government on a low-bid basis for a specification product. To guarantee the quality of the purchased product, satisfactory methods for chemical analysis must be developed and included in the specification.

Monoethanolamine and three glycol ethers are required ingredients in the carbon-removing compound of Federal Specification P-C-111D as shown in Table 1.

Table 1. Composition Requirements for Federal Specification P-C-111D,  
Carbon-Removing Compound

Ingredient	Requirements, Percent by Volume
Monoethanolamine	21.0 min.
Ethylene glycol monobutyl ether	9.0 min.
Diethylene glycol monomethyl ether	5.0 min.
Diethylene glycol monobutyl ether	3.0 min.
Water	55±3

The material which meets all of the specification requirements approximates the comparison formula of P-C-111D (Table 2).

The literature presents several methods for the quantitative analysis of monoethanolamine. These include a gas-liquid chromatographic determination as a trifluoroacetyl derivative,<sup>1</sup> a nonspecific acidic titration,<sup>2</sup> various colorimetric methods, and separation by column chromatography.<sup>3</sup> The nonspecific acidic titration method is currently employed in Federal Specification P-C-111D but is obviously a

<sup>1</sup> L. E. Brydia and H. E. Ferslager, *Analytical Chemistry* 39, No. 11, 1318-1320 (1967).

<sup>2</sup> Sidney Sigga, *Quantitative Organic Analysis via Functional Groups*, John Wiley and Sons, Inc., 423 (1963).

<sup>3</sup> D. D. Christensen *et al*, *Analytical Chemistry* 32, 874 (1960).

Table 2. Comparison Formula for P-C-111D, Carbon-Removing Compound

Ingredient	Percent by Volume
Ethylene glycol monobutyl ether	9.0
Diethylene glycol monobutyl ether	3.9
Diethylene glycol monomethyl ether	6.0
Monoethanolamine	21.5
Nonionic Surfactant	2.0
Oleic acid	2.0
Sodium silicate solution (0.25% by volume of 40° Baumé solution in distilled water)	55.6

poor method because of the possible presence of interfering alkaline materials. Because of interferences, the other methods were found to be unsuitable without time-consuming preliminary separations.

The procedure developed in this investigation is completely satisfactory for the simultaneous quantitative determination for both the monoethanolamine and the glycol ethers in the P-C-111D carbon remover. The method is intended to replace the nonspecific titration method now used for monoethanolamine and the more cumbersome column- and gas-chromatographic (GC) method used for the glycol ethers.

## II. DETAILS OF TEST

3. **Instrumental Analysis.** The method employs gas-liquid chromatography utilizing a thermal conductivity detector and a two-column system:

a. **Precolumn:** 4-inch-long by 1/8-inch-outside diameter, teflon-coated stainless steel packed with 20-percent SE-30 on 60-80-mesh chromosorb WAW.

b. **6-foot-long** by 1/8-inch-outside-diameter, teflon-coated stainless steel packed with 10-percent Reoplex 400 on 80-100-mesh chromosorb WHP.

The GC operating parameters are as follows: glass-lined injection port, 250° C; carrier (helium) flow, 25 ml/minute; thermal conductivity detector, 300° C; initial column oven temperature, 125° C; rate of oven temperature increase, 1° C/minute; final oven temperature, 165° C; length of run, 40 minutes.

4. **Calculations.** Chromatogram peaks are identified in the usual way by relative retention times. Correction factors are determined from compositions of known concentrations. Concentrations in percent by volume are calculated from the commonly used equation:

$$C = \frac{ADF}{B}$$

where A is the area under the peak in question, B is the area under the internal standard peak, D is the concentration of the internal standard, and F is the correction factor.

5. **Preparation of Sample.** Pipette 20 ml of the material to be analyzed and 2 ml of the internal standard, hexyl carbitol, into a 100-ml beaker. Mix with a glass stirring rod. Add 10 g of anhydrous  $K_2CO_3$  and stir until it is dissolved. This material will at first become pasty but with a few minutes of further stirring will go into solution. Transfer the solution to a 125-ml separatory funnel and let separate. Discard the lower layer and transfer the top layer to a 50-ml glass-stoppered Erlenmeyer flask. Add 10 ml n-butanol to the flask, stopper, and mix gently. Add 20 g of anhydrous  $K_2CO_3$  and shake the flask vigorously for 2 minutes. Let the solution settle, then decant it into a centrifuge tube. Stopper and centrifuge until the solution is clear. Using a 5- $\mu$ l syringe, inject a 2- $\mu$ l sample into the injection port of the gas-liquid chromatograph operated under the conditions specified in paragraph 3.

6. **Results.** The final sample prepared by this method for gas chromatographic analysis contains the glycol ethers, monoethanolamine, water (about 5 percent of the product), and the nonionic surfactant. The nonionic surfactant and other high-boiling-point materials that may be present in commercial samples are not determined but, instead, are trapped on the precolumn which is replaced periodically to maintain satisfactory and reproducible peak resolution.

Figure 1 is a typical chromatogram of a known material formulated to meet all of the requirements of P-C-111D. This single chromatogram suffices for the quantitative determination of monoethanolamine and the three required glycol ethers. Table 3 compares the results obtained with the true concentrations.

Figure 2 illustrates a commercial sample which meets the requirements of P-C-111D. Table 4 compares the analytical results from the chromatogram with the composition claimed by the manufacturer. Again the close agreement confirms the reliability of the method.

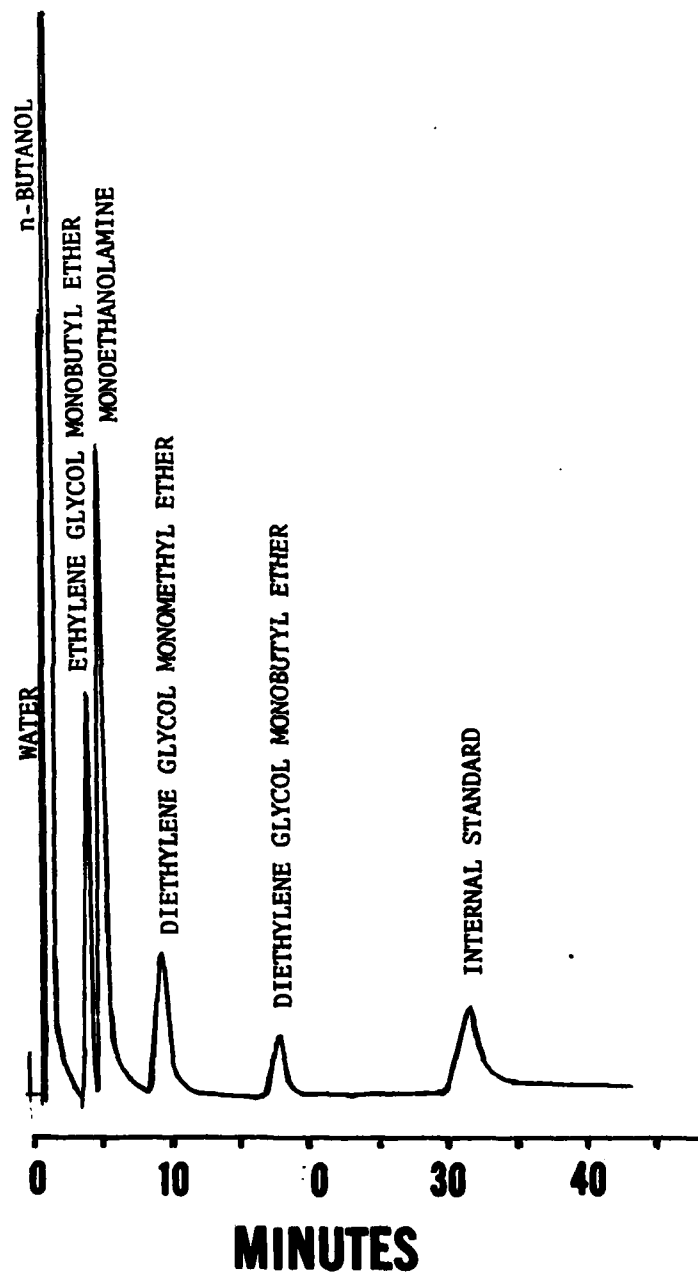


Figure 1. Chromatogram of a carbon-removing compound formulated to meet all of the requirements of P-C-111D.

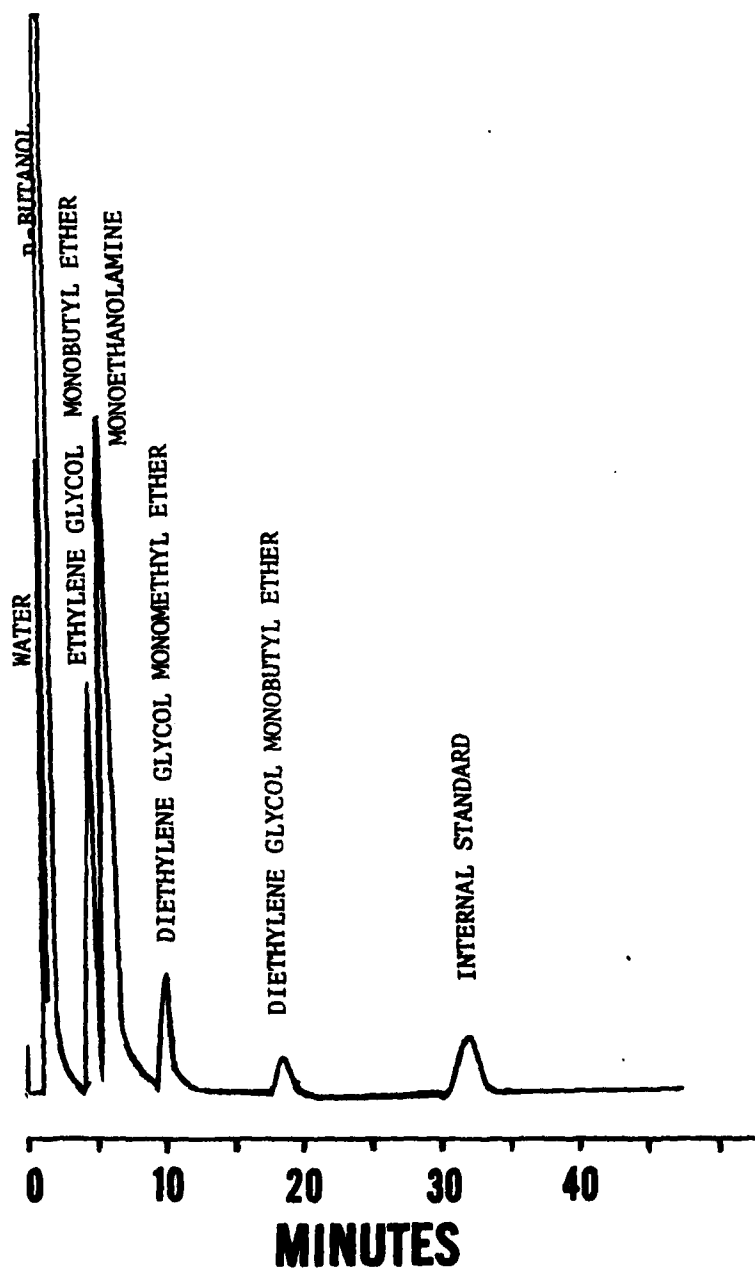


Figure 2. Chromatogram of a commercial carbon-removing compound.

Table 3. Analysis of Carbon-Removing Compound with Known Concentrations

Ingredient	Concentration, Volume Percent	
	Known	Found
Ethylene glycol monobutyl ether	10.0	9.9
Monoethanolamine	18.0	18.4
Diethylene glycol monomethyl ether	5.0	5.1
Diethylene glycol monobutyl ether	5.0	5.0
Detergent, nonionic	2.0	Not determined
Oleic acid	2.0	Not determined
Sodium silicate solution (0.25 percent by volume of 40° Baume' solution in distilled water)	58.0	Not determined

Table 4. Analytical Results Compared to Claimed Composition of a Commercial Sample of Carbon-Removing Compound

Ingredient	Volume Percent	
	Found	Claimed
Ethylene glycol monobutyl ether	9.1	9.4
Monoethanolamine	21.8	21.7
Diethylene glycol monomethyl ether	5.2	5.3
Diethylene glycol monobutyl ether	3.2	3.6

### III. CONCLUSION

7. **Conclusion.** A gas chromatographic method was developed for the simultaneous quantitative determination of monoethanolamine and the glycol ethers in carbon-removing compounds similar to that covered by Federal Specification P-C-111D. The method can replace the two methods used for the quantitative determination of these materials. The method has important advantages. It is less time-consuming than the current method for the glycol ethers. The identification of the monoethanolamine by its peak retention time is regarded as a positive qualitative test, which is lacking in the nonspecific method now used.

The method developed will be recommended for inclusion in Federal Specification P-C-111D.